


# LIGHTLY EXPRESSED® LIGHT BARS

## description\_ordering guide\_specifications



light bars

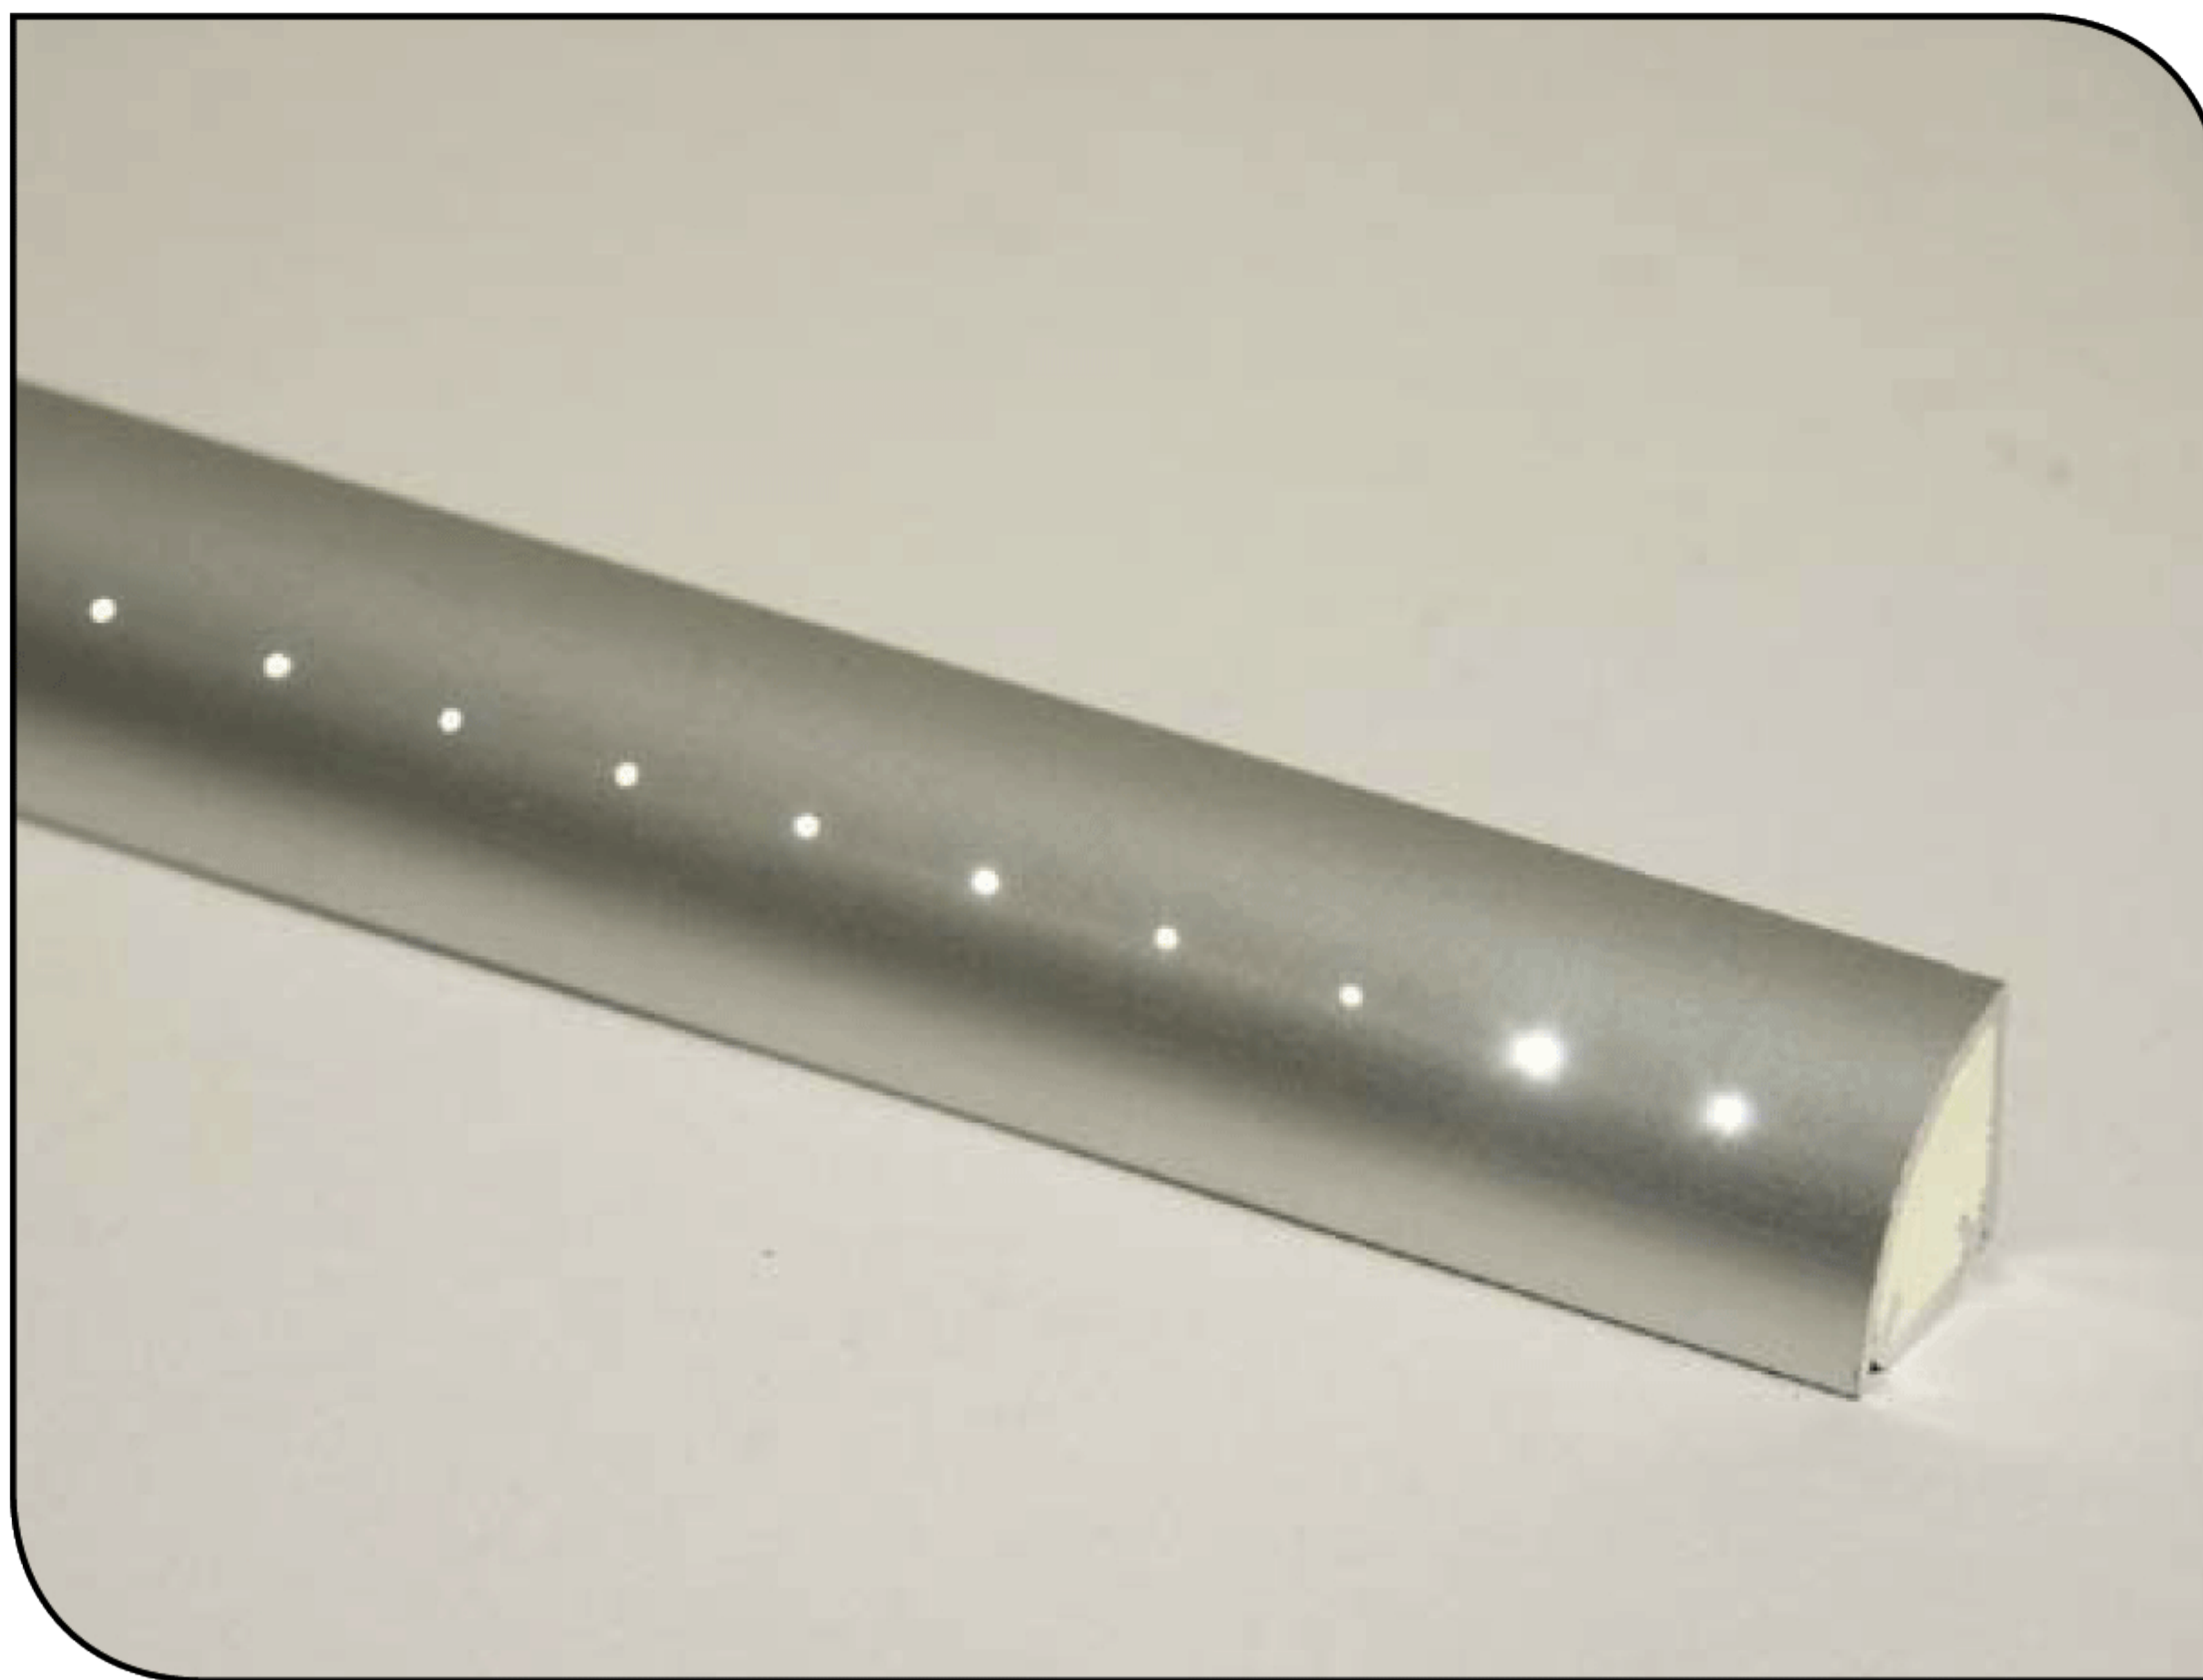

### LIGHTBEAM QUARTER ROUND

**Description:**  
 LightBeam Quarter Round by Fiberstars® makes it possible for you to illuminate along a linear path with the light aimed exactly where you want it and at exactly the right intensity. The light that is directed has no electrical hazard, no ultra-violet rays, and is virtually infra-red free.  
 Low profile, linear light fixture. Quarter round shape allows angular light distribution in a standard or compact frame. Available in low, medium or high light intensities. Quality aluminum extrusion of rugged construction.

<b>LBQR</b>						
<b>ordering guide</b>	<b>Lit Length:</b> ( ) SPECIFY INCHES	<b>Tail Length:</b> ( ) SPECIFY FEET	<b>Wash Intensity:</b> <b>01F</b> 1 Fiber per inch TFO Line <b>02F</b> 2 Fibers per inch TFO Line <b>04F</b> 4 Fibers per inch TFO Line <b>05F</b> 5 Fibers per inch EFO11 <b>06F</b> 6 Fibers per inch EFO11 <b>08F</b> 8 Fibers per inch TFO Line <b>10F</b> 10 Fibers per inch EFO11 <b>00C</b> Custom	<b>Base Size:</b> <b>S</b> STANDARD (1 1/4") <b>C</b> COMPACT (3/4")	<b>Finishes:</b> <b>S</b> STANDARD CLEAR ANODIZED <b>B</b> BLACK ANODIZED	<b>Tail Exit:</b> <b>L</b> LEFT <b>R</b> RIGHT <b>C</b> CUSTOM

<p><b>Specifications:</b>  <b>Beam Spread:</b> 60°  <b>Max Lit Lengths:</b> STANDARD SIZE: HIGH INTENSITY 108" (2776MM), MEDIUM AND LOW INTENSITY 120" (3084MM). COMPACT SIZE: HIGH INTENSITY 36" (914MM), MEDIUM INTENSITY 84" (2134MM), LOW INTENSITY 120" (3084MM)  <b>Base Sizes:</b> STANDARD SIZE: 1 1/4" QR (31.75MM) COMPACT SIZE: 3/4" QR (19.05MM)  <b>Mounting:</b> LB-MB (SEE PAGE 16) OR SIMILAR SURFACE MOUNT.  <b>Technical Remarks:</b> LIGHT EMITS 45 DEGREES FROM RIGHT-ANGLE SIDE; OTHER AIMS POSSIBLE BY SPECIAL ORDER.  <b>Cable Diameters:</b> STANDARD SIZE: 7/8" MAX COMPACT SIZE: 9/16" MAX  <b>Max Fiber Capacity:</b> 300 FIBERS  <b>Max Lamp Wattage:</b> 150W METAL HALIDE</p>	<p><b>Compact Base Configuration:</b></p>	<p><b>Standard Base Configuration:</b></p>
---	---	--

<p><b>Isometric Key:</b>  <b>H</b> BASE SIZE  <b>L</b> LENGTH UP TO 120"  <b>S</b> FIBER SPACING (0.25", 0.5", &amp; 1")  <b>T</b> TAIL LENGTH</p>	<p><b>Isometric:</b></p>	<p><b>Cross Section:</b></p> <p>Section A-A</p>
--	--------------------------	---