

TYPE:

JOB:


ORDERING CODE:

APPROVAL:

DATE:

SPECIFICATIONS

- Housing:** Die cast aluminum
- Lens:** Injection molded transparent polycarbonate
- Beam Spread:** Spot ~13° (SPT), Narrow Flood ~23° (NFL) and Flood ~33° (FLD)
- Operating Position:** Full 358° rotation with locking yoke; 90° swivel on track
- Finish:** Textured powder coating; available in White or Black
- Fasteners:** Aluminum
- Weight:** 1.56 lbs.
- Noise:** 0 dB, no Fan, Class A rating
- Input Voltage:** 120 VAC
- Power Consumption:** 15 Watts (typical)
- Power Factor:** > 0.9
- Electrical Connection:** Compatible with many track systems.
Single circuit and three circuit adapters available (see ordering guide for more details)
- Optical System:** Eight (8) high intensity LED emitters with custom focusing optics.
- Lamp Life:** 50,000 hours to 70% lumen maintenance
- Transient Protection:** Complies with IEEE C.62.41-1991, Class A operation
- UL / IP Rating:** Indoor use only / IP20, Class 1
- Operating Temp Range:** -20°C to 45°C

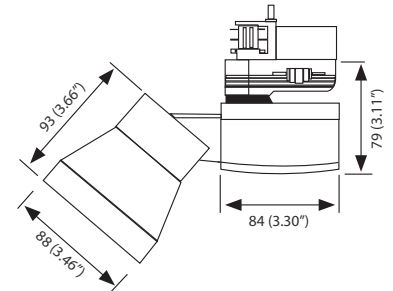

LED TrackLight

Ordering Guide

Lamp Type	Color Temp	Beam Spread	Size	Adapter	Color
LEDTR	830 - 80CRI, 3000K	SPT - Spot NFL - Narrow Flood FLD - Flood	15-15 Watts	1J - Single circuit; 120V; Juno compatible 1H - Single circuit; 120V; Halo compatible 1L - Single circuit; 120V; Lightolier compatible	WT - White BK - Black

TYPE:

ORDERING CODE:

APPROVAL:


JOB:

DATE:

SPECIFICATIONS

LEDTR-830SPT-15xx-yy

Lumen output: 618
Wattage: 14.53
Efficacy: 42.50 lpw
Beam Spread: 14°
CRI: 83.5
CCT: 3054 K
CBCP: 4884
LTL test report: 18792 & 18793

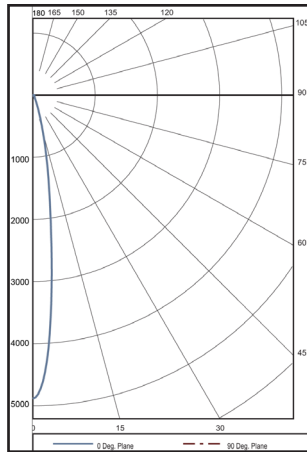


Zonal Lumen Summary

Zone	Lumens	% of Luminaire
0-30	497	80.4%
0-40	528	85.4%
0-60	581	94.1%
0-90	618	100.0%
90-180	0	0.0%
0-180	618	100.0%

Testing was performed in accordance with IES LM-79-08 in a caliper certified laboratory

LEDTR-830NFL-15xx-yy



Lumen output: 610
Wattage: 15.31
Efficacy: 39.8 lpw
Beam Spread: 23°
CRI: 81
CCT: 2996 K
CBCP: 1678
LTL test report: 20049 & 20050

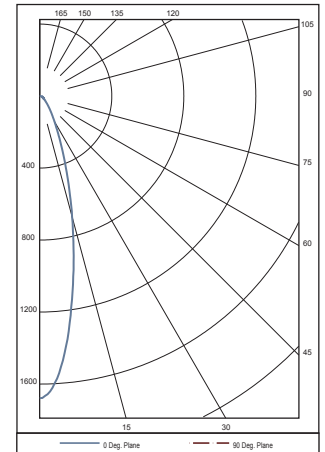

Zonal Lumen Summary

Zone	Lumens	% of Luminaire
0-30	439	72%
0-40	507	83.2%
0-60	574	94.2%
0-90	610	100%
90-180	0	0%
0-180	610	100%

Testing was performed in accordance with IES LM-79-08 in a caliper certified laboratory

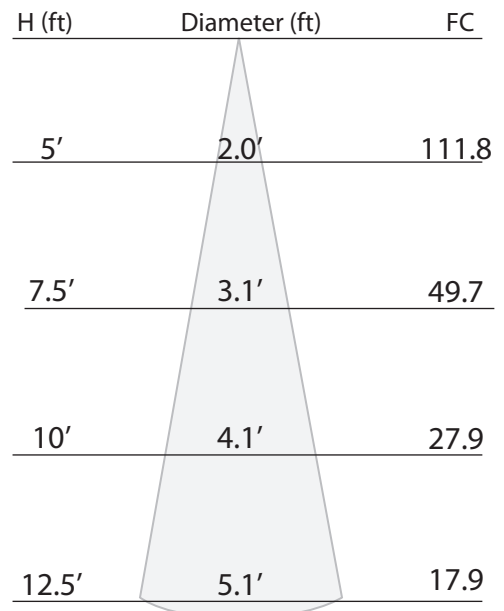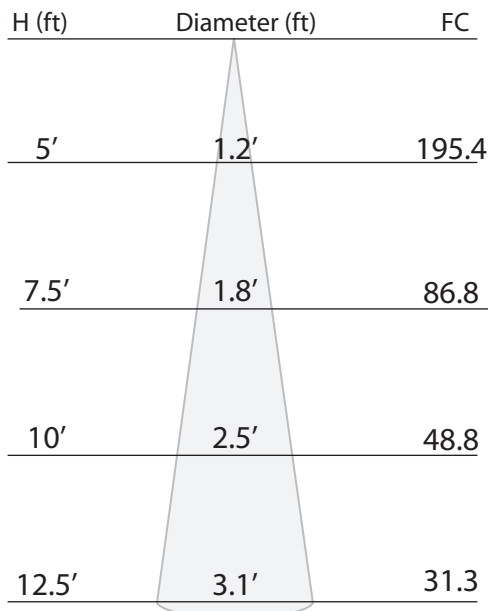

TYPE:

ORDERING CODE:

APPROVAL:

JOB:

DATE:

SPECIFICATIONS

LEDTR-830FLD-15xx-yy

Lumen output: 645.7

Wattage: 14.76

Efficacy: 43.70 lpw


Beam Spread: 35°

CRI: 82.3

CCT: 3076 K

CBCP: 1368

LTL test report: 18790 & 18791

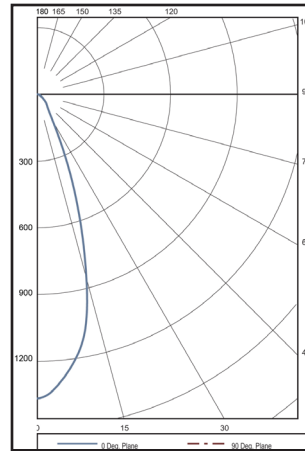

Zonal Lumen Summary

Zone	Lumens	% of Luminaire
0-30	480.9	74.5%
0-40	540	83.6%
0-60	611.7	94.7%
0-90	645.7	100.0%
90-180	0	0.0%
0-180	645.7	100.0%

Testing was performed in accordance with IES LM-79-08 in a caliper certified laboratory

