


LIGHTLY EXPRESSED® LIGHT BARS

description_ordering guide_specifications

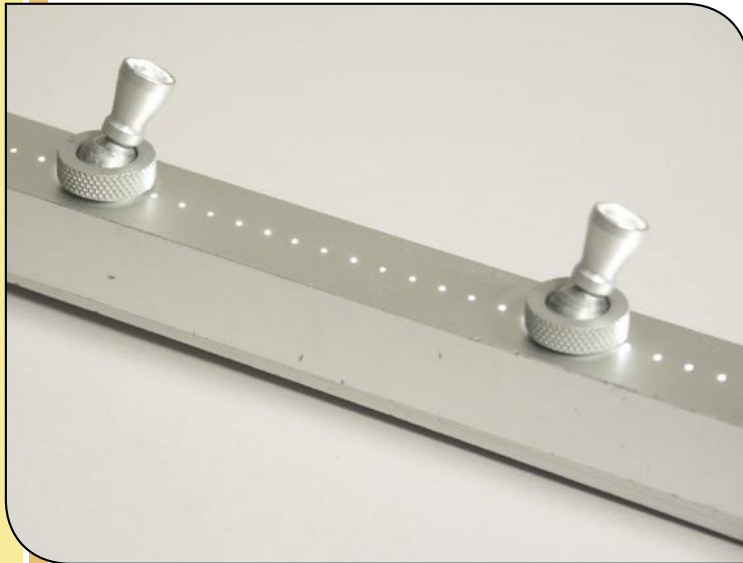

FOCI

→ →
→ →

Description:

A LightBeam fixture with adjustable aim spotlights spaced at intervals along the length of the fixture. Foci provides multiple miniature spot lights in a linear array. Unlike other miniature fiber optic spots, each Foci head is easily aimed and locked into position. A Foci head naturally emits light in a 60° cone. A standard lens fitting adds a 40° soft to hard spot option. Combining an even wash of light with adjustable highlights. Foci brings the drama of the theatre lighting to your display case design.

F							
ordering guide	Lit Length: () SPECIFY INCHES	Tail Length: () SPECIFY FEET	Head Spacing: 3 3" CENTERS 6 6" CENTERS 12 12" CENTERS C SPECIFY SPACING	Wash Intensity: H HIGH (0.25" SPACING) M MEDIUM (0.5" SPACING) L LOW (1" SPACING) Ø NO WASH (FOCI ONLY)	Base Size: S STANDARD	Finishes: S STANDARD CLEAR ANODIZED B BLACK ANODIZED	Tail Exit: L LEFT R RIGHT C CUSTOM

<p>Specifications:</p> <p>Beam Spread: WASH FIBERS 60°; SPOTLIGHTS 40°, 60° WITHOUT LENS</p> <p>Max Lit Lengths: DEPENDS ON INTENSITY OF WASH FIBERS AND QUANTITY OF SPOTLIGHTS</p> <p>Base Sizes: 1.01" W X 2.25" H (25.4MM X 31.75MM) INCLUDING LENS</p> <p>Mounting: LB-MB OR SIMILAR SURFACE MOUNT</p> <p>Technical Remarks: EACH SPOTLIGHT USES 25 STRANDS OF FIBER.</p> <p>Cable Diameters: STANDARD SIZE: 7/8" MAX</p> <p>Max Fiber Capacity: 300 FIBERS</p> <p>Max Lamp Wattage: 150W METAL HALIDE</p>	<p>Lens Adapter Specifications:</p> <p>Material: ALUMINUM</p> <p>Spot: 40° SOFT TO HARD EDGE</p> <p>Finish: CLEAR OR BLACK ANODIZED</p>	<p>Lens Adapter:</p>
---	---	-----------------------------

<p>Isometric Key:</p> <p>H HEAD SPACING</p> <p>L LENGTH UP TO 120"</p> <p>S FIBER SPACING (0.25", 0.5", & 1")</p> <p>T TAIL LENGTH</p>	<p>Isometric:</p>	<p>Cross Section:</p>
---	--------------------------	------------------------------